

REMARKS

With the above amendments, claims 1, 4-10, and 13-27 remain in the application. Claims 2-3 and 11-12 are hereby canceled without prejudice. Claims 1, 10, 26, and 27 are hereby amended. No new matter is being added.

Claim Rejections under 35 U.S.C. § 102

The pending claims stand rejected under 35 U.S.C. § 102 as anticipated by Olarig '680 (USP 6,038,680). These rejections are respectfully traversed for the claims as now amended.

Claim 1 as amended now recites as follows.

1. A method of visually locating a memory module, the method comprising:  
receiving an electronic communication by circuitry on the memory module to be visually located;  
activating a beacon state in the memory module due to receipt of the electronic communication; and  
electronically turning on a beacon device on the memory module when the beacon state is activated to draw attention to that memory module,  
**wherein the beacon device comprises an electromechanical device that remains activated even in the absence of power.**

(Emphasis added.)

As shown above, claim 1 now requires that **“the beacon device comprises an electromechanical device that remains activated even in the absence of power.”**  
(Emphasis added.)

The above-recited limitation finds support on page 11, lines 26 through page 12, line 9 of the original specification, which recites as follows.

In accordance with an embodiment of the invention, an example **electromechanical beacon device** is depicted in FIGS. 6A, 6B, and 6C. In this example, the electromechanical device comprises an electromechanical button or flag. Switches or other forms of electromechanical devices may also be used. FIG. 6A is a plan view (top view) of the example electromechanical device. FIG. 6B is a perspective view (side view) of the device with the electromechanical button or flag in the down (deactivated) position. FIG. 6C is a perspective view (side view) of the device with the electromechanical button or flag in the up (activated) position.

**Such electromechanical devices are particularly advantageous in that they do not require the application of power to the device in order to stay in an activated or “turned on” state. For example, during repair, often times power is removed from the system chassis. With such an electromechanical beacon device, the “flag” may be “popped” (like a circuit breaker) when activated. It will remain in the popped position, whether or not power is applied, until it is reset by a repair person or other user.**

(Emphasis added.)

An example electromechanical beacon device is illustrated in FIGS. 6A, 6B and 6C. For convenience of reference, FIGS. 6B and 6C are reproduced below.

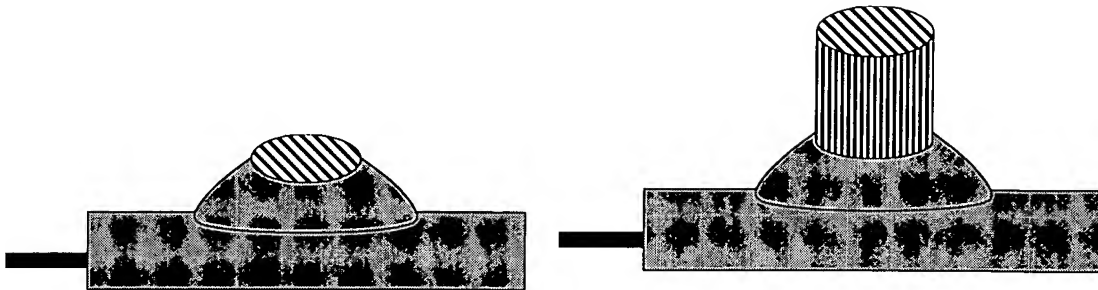


FIG. 6B  
(Perspective View)  
(Button Down)

FIG. 6C  
(Perspective View)  
(Button Up)

Applicants respectfully submit that Olarig '680 neither teaches nor suggests the above-recited limitation where the beacon device comprises an electromechanical beacon device.

In particular, column 8, lines 17-27 of Olarig '680 discloses that "so long as the register 68 records a fault condition, the module 55b contained in the connector 57 continues to be utilized even after power down." However, the register 68 is not an electromechanical beacon device because it is neither electromechanical nor visible to a repair person. Furthermore, the module 55b which "continues to be utilized" is the auxiliary memory module 55b as shown in FIG. 1 of Olarig '680, not an electromechanical beacon device.

Hence, applicants respectfully submit that claim 1, as amended, is now patentably distinguished over the cited art.

Claims 4- 9 depend from claim 1. As such, claims 4-9 are patentable over the cited art for at least the same reasons discussed above in relation to claim 1.

Regarding independent claim 10, claim 10 as amended now recites as follows.

10. An apparatus to visually locate a memory module in a memory system with a plurality of memory modules, the apparatus comprising:
  - a system board including a memory controller and a plurality of memory module slots on the system board;
  - a plurality of memory modules seated in the plurality of memory module slots; and
  - a beacon unit on a memory module with a beacon device and control circuitry for turning on the beacon device when an electronic communication to turn on the beacon device is received by that memory module,**wherein the beacon device comprises an electromechanical device that remains activated even in the absence of power.**

(Emphasis added.)

As shown above, claim 10 now requires that **“the beacon device comprises an electromechanical device that remains activated even in the absence of power.”**

(Emphasis added.)

Similar to the discussion above in relation to claim 1, applicants respectfully submit that Olarig ‘680 neither teaches nor suggests the above-recited limitation in claim 10 where the beacon device comprises an electromechanical beacon device.

Hence, applicants respectfully submit that claim 10, as amended, is now patentably distinguished over the cited art.

Claims 13-26 depend from claim 10. As such, claims 13-26 are patentable over the cited art for at least the same reasons discussed above in relation to claim 10.

Regarding independent claim 27, claim 27 as amended now recites as follows.

27. A system for visually locating a memory module, the system comprising:  
means for receiving an electronic communication by circuitry on the memory module to be visually located;  
means for activating a beacon state in the memory module due to receipt of the electronic communication; and  
means for electronically turning on a beacon device on the memory module when the beacon state is activated to draw attention to that memory module,  
**wherein the beacon device comprises an electromechanical device that remains activated even in the absence of power.**

(Emphasis added.)

As shown above, claim 27 now requires that **“the beacon device comprises an electromechanical device that remains activated even in the absence of power.”**

(Emphasis added.)

Similar to the discussion above in relation to claim 1, applicants respectfully submit that Olarig ‘680 neither teaches nor suggests the above-recited limitation in claim 27 where the beacon device comprises an electromechanical beacon device.

Hence, applicants respectfully submit that claim 27, as amended, is now patentably distinguished over the cited art.

Conclusion


For at least the above reasons, it is respectfully submitted that claims 1, 4-10, and 13-27, as hereby amended, are now patentably distinguished over the cited art.

The Examiner is invited to telephone the undersigned at (408) 436-2111 for any questions.


If for any reason an insufficient fee has been paid, the Commissioner is hereby authorized to charge the insufficiency to Deposit Account No. 08-2025.

Respectfully submitted,  
Thane Larson et al.

Dated: March 2, 2006



James K. Okamoto, Reg. No. 40,110  
Okamoto & Benedicto LLP  
P.O. Box 641330  
San Jose, CA 95164  
Tel.: (408)436-2110  
Fax.: (408)436-2114

CERTIFICATE OF MAILING			
I hereby certify that this correspondence, including the enclosures identified herein, is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on the date shown below. If the Express Mail Mailing Number is filled in below, then this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service pursuant to 37 CFR 1.10.			
Signature:			
Typed or Printed Name:	James K. Okamoto	Dated:	March 2, 2006
Express Mail Mailing Number (optional):			